

APPLICATION NOTE

Document NO. AN-UHF-106-A
Date : 16th Feb. 2010
Rev. Date : 22th Jun. 2010
Prepared : Y.Takase
 S.Kametani
Confirmed : T.Okawa
(Taking charge of Silicon RF by
 MIYOSHI Electronics)

SUBJECT: RD07MUS2B TETRA single-stage amplifier at f=350-400MHz, Vdd=7.2V

SUMMARY:

This application note shows the TETRA data .

- Sample history :
 RD07MUS2B: Lot number "08XXA-G", Sample No. "5"

- Evaluate conditions :
 @ f=350MHz, 375MHz, 400MHz, Vdd=7.2V, Idq=250mA
 $\pi/4$ DQPSK, Filter ($\alpha=0.35$), Symbol rate=18ksps, Band Width=18kHz

- Results :
 Page 2. shows the summary data.
 Page 3. shows the Pout characteristics data.
 Page 4. shows the Pin characteristics data.
 Page 5-7. shows the characteristics data.
 Page 8. shows the Input / Output impedance vs. Frequency characteristics.
 Page 9. shows the equivalent circuit.

1. Summary

@Vdd=7.2V, Idq=250mA (Vgg=1.47V)

f (MHz)	@ Po=3W (Pin ; control)					@ Po=4W (Pin ; control)				
	ACP_1L * (dBc)	ACP_1H * (dBc)	I _{dd} (A)	η _d (%)	G _p (dB)	ACP_1L * (dBc)	ACP_1H * (dBc)	I _{dd} (A)	η _d (%)	G _p (dB)
350	-45.6	-44.6	1.28	32.6	19.5	-39.8	-39.0	1.48	37.5	19.4
375	-43.5	-42.8	1.15	36.3	21.4	-37.1	-36.7	1.33	41.7	21.1
400	-40.6	-40.3	1.02	40.9	19.7	-34.1	-34.0	1.17	47.4	19.3

* ACP_1L ; ACP Low @Channel Spacing = 25kHz

ACP_1H ; ACP High @Channel Spacing = 25kHz

Conditions

@ Modulation type ; $\pi/4$ DQPSK, Filter ($\alpha=0.35$, Current filter response ; Root cosine),
Band Width=18kHz, Symbol rate=18ksps, PRBS9 (PN9)

Setting ; Spectrum Analyzer

Resolution BW ; 300Hz, Video BW ; 3kHz, Sweep Time ; 1.5s,







Channel Spacing=25kHz (Band Width=18kHz),

Detector ; RMS, Average sweep count "8"

2. RF characteristics


2-1. Pout vs.

@ Vdd=7.2V, Idq=250mA, f=350MHz, 375MHz, 400MHz

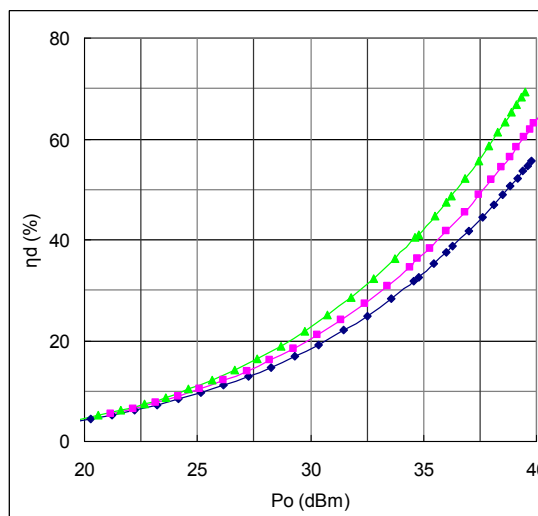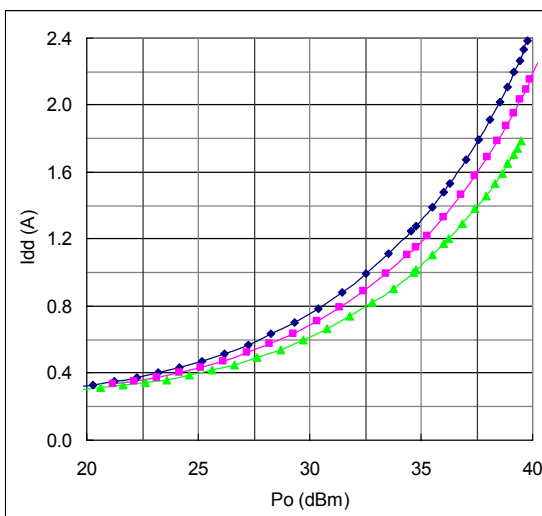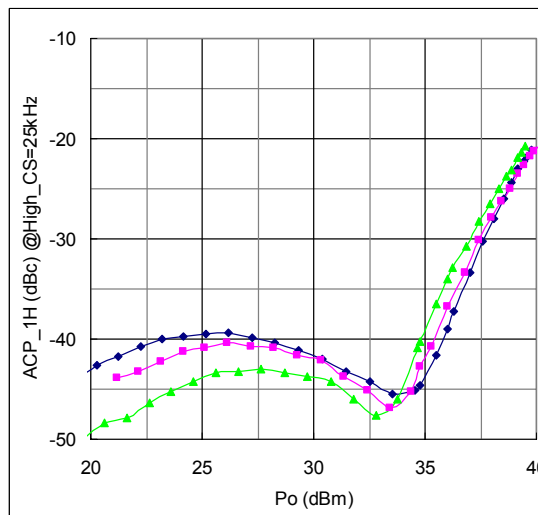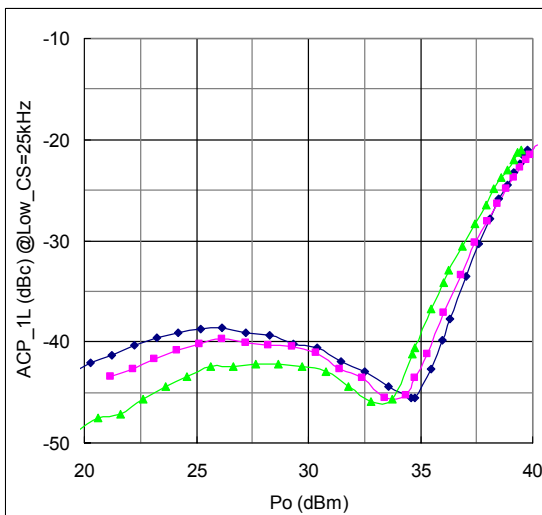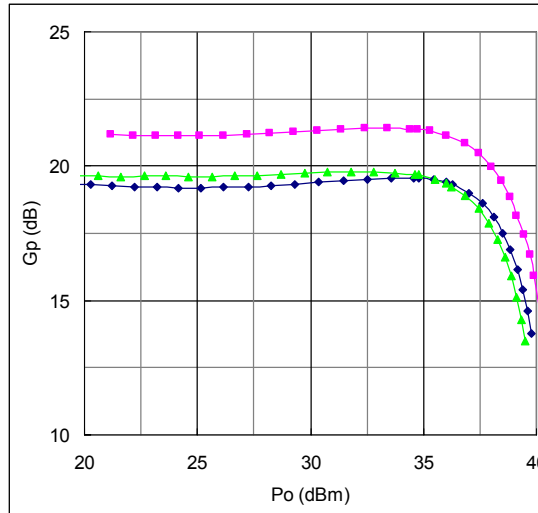

2-2. Pin vs.

@ Vdd=7.2V, Idq=250mA, f=350MHz, 375MHz, 400MHz

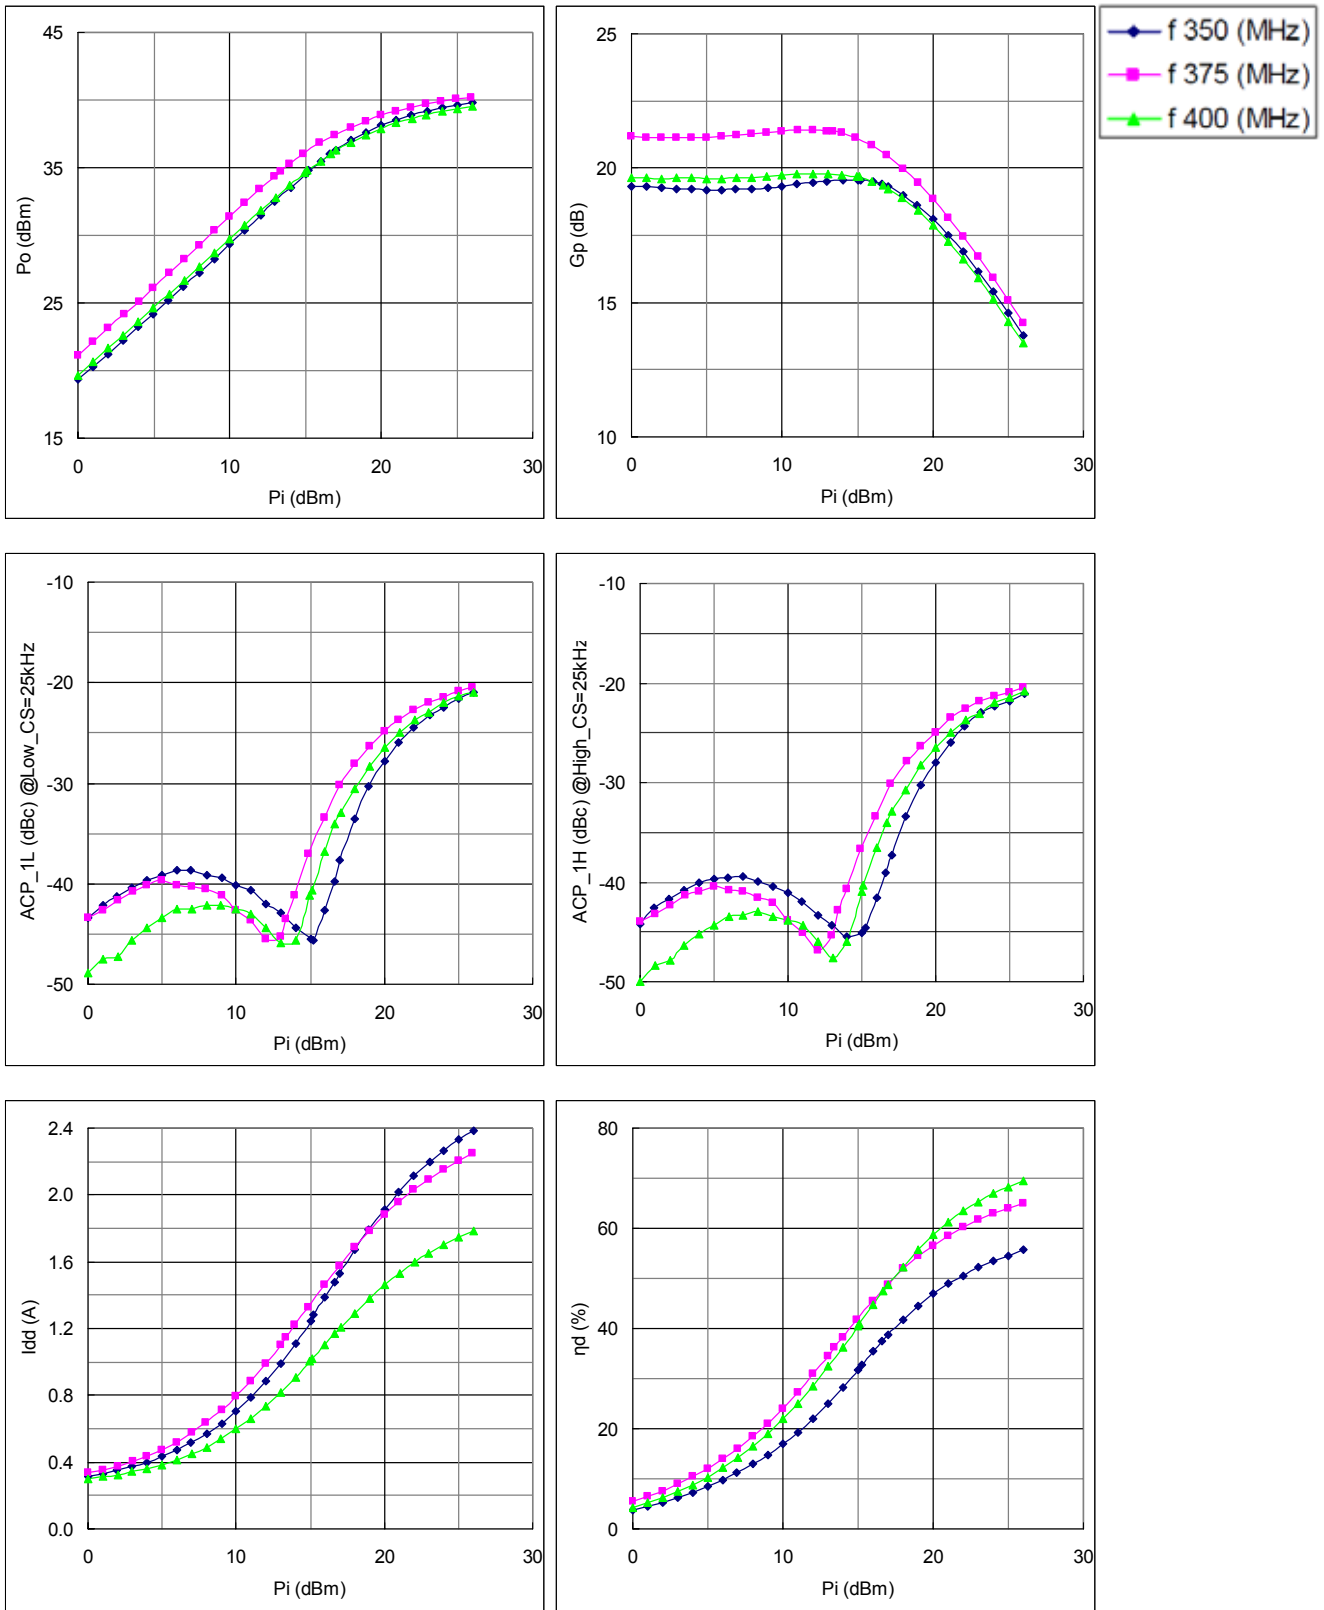

3. RF characteristics data

3-1. @ f=350MHz, Vdd=7.2V, Idq=250mA (Vgg=1.47V)

Pin		Po		Gp (dB)	Idd (A)	η d (%)	ACP_1L* (dBc)	ACP_1H* (dBc)
(dBm)	(W)	(dBm)	(W)					
0.0	0.001	19.3	0.09	19.3	0.32	3.8	-43	-44
1.0	0.001	20.3	0.11	19.3	0.33	4.5	-42	-43
2.0	0.002	21.2	0.13	19.3	0.35	5.3	-41	-42
3.0	0.002	22.2	0.17	19.2	0.37	6.2	-40	-41
4.0	0.003	23.2	0.21	19.2	0.40	7.3	-40	-40
5.0	0.003	24.2	0.26	19.2	0.43	8.4	-39	-40
6.0	0.004	25.2	0.33	19.2	0.47	9.7	-39	-40
6.9	0.005	26.2	0.41	19.2	0.52	11.1	-39	-39
8.0	0.006	27.2	0.53	19.2	0.57	12.9	-39	-40
9.0	0.008	28.3	0.67	19.3	0.63	14.7	-39	-40
10.0	0.010	29.3	0.86	19.3	0.70	16.9	-40	-41
11.0	0.013	30.4	1.09	19.4	0.79	19.2	-41	-42
12.0	0.016	31.5	1.40	19.4	0.89	22.0	-42	-43
13.0	0.020	32.5	1.78	19.5	0.99	24.9	-43	-44
14.0	0.025	33.6	2.27	19.5	1.11	28.3	-44	-46
15.0	0.032	34.6	2.85	19.5	1.25	31.8	-46	-45
15.2	0.033	34.8	3.00	19.5	1.28	32.6	-46	-45
16.0	0.040	35.5	3.54	19.5	1.39	35.4	-43	-42
16.6	0.046	36.0	3.99	19.4	1.48	37.5	-40	-39
17.0	0.050	36.3	4.27	19.3	1.53	38.8	-38	-37
18.0	0.063	37.0	5.03	19.0	1.67	41.7	-34	-33
19.0	0.079	37.6	5.77	18.6	1.80	44.6	-30	-30
20.0	0.101	38.1	6.48	18.1	1.92	46.9	-28	-28
21.0	0.126	38.5	7.10	17.5	2.02	48.9	-26	-26
22.0	0.158	38.9	7.69	16.9	2.11	50.6	-25	-24
23.0	0.201	39.2	8.25	16.1	2.20	52.2	-23	-23
24.0	0.253	39.4	8.74	15.4	2.27	53.6	-22	-22
25.0	0.317	39.6	9.15	14.6	2.33	54.6	-22	-22
26.0	0.400	39.8	9.54	13.8	2.38	55.7	-21	-21

*ACP_1L ; ACP Low @Channel Spacing = 25kHz
 ACP_1H ; ACP High @Channel Spacing = 25kHz

RD07MUS2B TETRA single-stage amplifier at f=350-400MHz,Vdd=7.2V

- AN-UHF-106-A-

3-2. @ f=375MHz, Vdd=7.2V, Idq=250mA (Vgg=1.47V)

Pin		Po		Gp (dB)	Idd (A)	η d (%)	ACP_1L*	ACP_1H*
(dBm)	(W)	(dBm)	(W)					
0.0	0.001	21.2	0.13	21.2	0.33	5.4	-43	-44
1.0	0.001	22.2	0.16	21.1	0.35	6.5	-43	-43
2.0	0.002	23.1	0.21	21.1	0.38	7.6	-42	-42
3.0	0.002	24.1	0.26	21.1	0.40	8.9	-41	-41
4.0	0.003	25.1	0.33	21.1	0.44	10.4	-40	-41
5.0	0.003	26.1	0.41	21.2	0.47	12.1	-40	-40
6.0	0.004	27.2	0.52	21.2	0.52	13.9	-40	-41
7.0	0.005	28.2	0.66	21.2	0.57	16.0	-40	-41
8.0	0.006	29.3	0.84	21.3	0.64	18.4	-41	-42
9.0	0.008	30.3	1.08	21.3	0.71	21.1	-41	-42
10.0	0.010	31.4	1.37	21.4	0.79	24.0	-43	-44
11.0	0.013	32.4	1.74	21.4	0.89	27.3	-44	-45
12.0	0.016	33.4	2.20	21.4	0.99	30.9	-46	-47
13.0	0.020	34.4	2.74	21.4	1.10	34.5	-45	-45
13.4	0.022	34.8	2.99	21.4	1.15	36.3	-44	-43
14.0	0.025	35.3	3.38	21.3	1.22	38.4	-41	-41
14.9	0.031	36.0	4.00	21.1	1.33	41.7	-37	-37
16.0	0.040	36.8	4.81	20.8	1.47	45.4	-33	-33
17.0	0.050	37.4	5.55	20.5	1.58	48.8	-30	-30
18.0	0.063	38.0	6.32	20.0	1.69	51.9	-28	-28
19.0	0.079	38.4	6.99	19.5	1.78	54.4	-26	-26
20.0	0.100	38.8	7.67	18.9	1.88	56.5	-25	-25
21.0	0.126	39.1	8.19	18.1	1.95	58.5	-24	-24
22.0	0.159	39.5	8.83	17.5	2.03	60.3	-23	-23
23.0	0.199	39.7	9.32	16.7	2.10	61.8	-22	-22
24.0	0.251	39.9	9.77	15.9	2.15	63.0	-22	-21
25.0	0.315	40.1	10.17	15.1	2.21	64.1	-21	-21
26.0	0.395	40.2	10.54	14.3	2.25	65.1	-21	-21

*ACP_1L ; ACP Low @Channel Spacing = 25kHz
 ACP_1H ; ACP High @Channel Spacing = 25kHz

RD07MUS2B TETRA single-stage amplifier at f=350-400MHz,Vdd=7.2V

- AN-UHF-106-A-


3-3. @ f=400MHz, Vdd=7.2V, Idq=250mA (Vgg=1.47V)

Pin		Po		Gp (dB)	Idd (A)	η d (%)	ACP_1L* (dBc)	ACP_1H* (dBc)
(dBm)	(W)	(dBm)	(W)					
0.0	0.001	19.6	0.09	19.6	0.30	4.3	-49	-50
1.0	0.001	20.6	0.12	19.6	0.31	5.2	-48	-48
2.0	0.002	21.6	0.15	19.6	0.33	6.2	-47	-48
3.0	0.002	22.6	0.18	19.6	0.34	7.4	-46	-46
4.0	0.003	23.6	0.23	19.6	0.36	8.8	-44	-45
5.0	0.003	24.6	0.29	19.6	0.39	10.4	-43	-44
6.0	0.004	25.6	0.37	19.6	0.42	12.2	-43	-43
7.0	0.005	26.6	0.46	19.6	0.45	14.2	-43	-43
8.0	0.006	27.6	0.58	19.7	0.49	16.5	-42	-43
9.0	0.008	28.7	0.74	19.7	0.54	19.0	-42	-43
10.0	0.010	29.7	0.94	19.7	0.60	21.9	-43	-44
11.0	0.013	30.8	1.19	19.8	0.66	25.0	-43	-44
12.0	0.016	31.8	1.52	19.8	0.74	28.5	-44	-46
13.0	0.020	32.8	1.91	19.8	0.82	32.4	-46	-48
14.0	0.025	33.7	2.37	19.8	0.91	36.2	-46	-46
15.0	0.031	34.7	2.92	19.7	1.00	40.4	-41	-41
15.1	0.032	34.8	3.00	19.7	1.02	40.9	-41	-40
16.0	0.040	35.5	3.54	19.5	1.10	44.7	-37	-37
16.7	0.047	36.0	4.00	19.3	1.17	47.4	-34	-34
17.0	0.050	36.3	4.23	19.2	1.21	48.7	-33	-33
18.0	0.063	36.9	4.86	18.9	1.29	52.3	-31	-31
19.0	0.080	37.4	5.53	18.4	1.38	55.6	-28	-28
20.0	0.101	37.9	6.18	17.9	1.46	58.7	-27	-27
21.0	0.127	38.3	6.75	17.3	1.53	61.3	-25	-25
22.0	0.160	38.6	7.29	16.6	1.60	63.5	-24	-24
23.0	0.200	38.9	7.76	15.9	1.65	65.3	-23	-23
24.0	0.252	39.1	8.20	15.1	1.70	66.9	-22	-22
25.0	0.319	39.3	8.57	14.3	1.75	68.3	-21	-21
26.0	0.398	39.5	8.94	13.5	1.79	69.4	-21	-21

*ACP_1L ; ACP Low @Channel Spacing = 25kHz
 ACP_1H ; ACP High @Channel Spacing = 25kHz

4. Input / Output Impedance vs. Frequency characteristics

Z_{out}^* ($f=350,375,400\text{MHz}$)

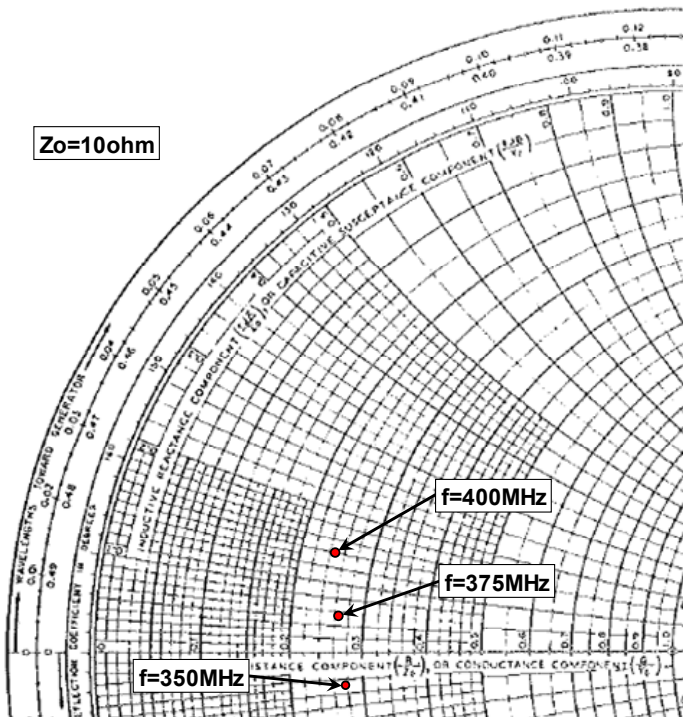


@ $P_o=4\text{W}$, $V_{dd}=7.2\text{V}$,
 $I_{dq}=250\text{mA}$ (V_{gg} adj.)

f (MHz)	Z_{out}^* (ohm)
350	2.78-j0.54
375	2.68+j0.53
400	2.52+j1.39

Z_{out}^* : Complex conjugate of Output impedance.

Z_{in}^* ($f=350,375,400\text{MHz}$)

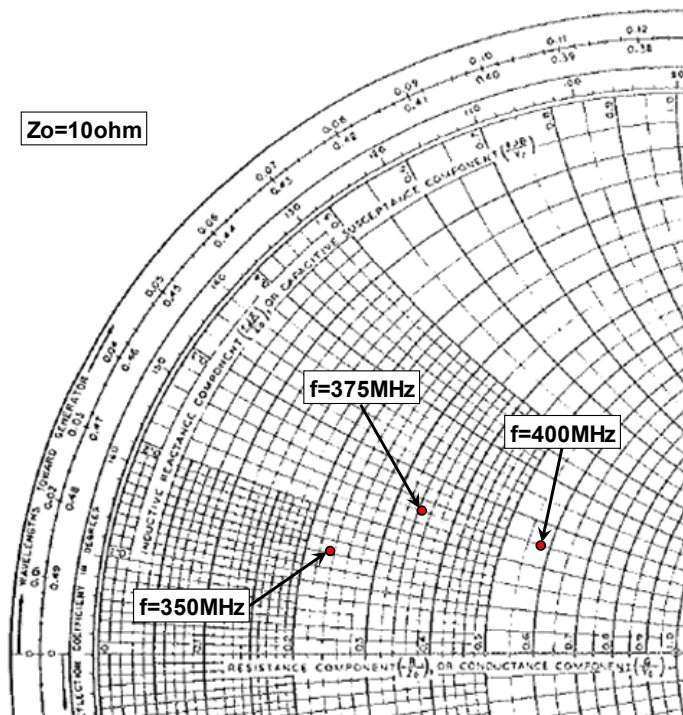

@ $P_o=4\text{W}$, $V_{dd}=7.2\text{V}$,
 $I_{dq}=250\text{mA}$ (V_{gg} adj.)


f (MHz)	Z_{in}^* (ohm)
350	2.41+j1.43
375	3.52+j2.41
400	5.87+j2.47

Z_{in}^* : Complex conjugate of Input impedance.

RD07MUS2B TETRA single-stage amplifier at f=350-400MHz, Vdd=7.2V

- AN-UHF-106-A-

5. Equivalent circuit (@f=350 to 400MHz)

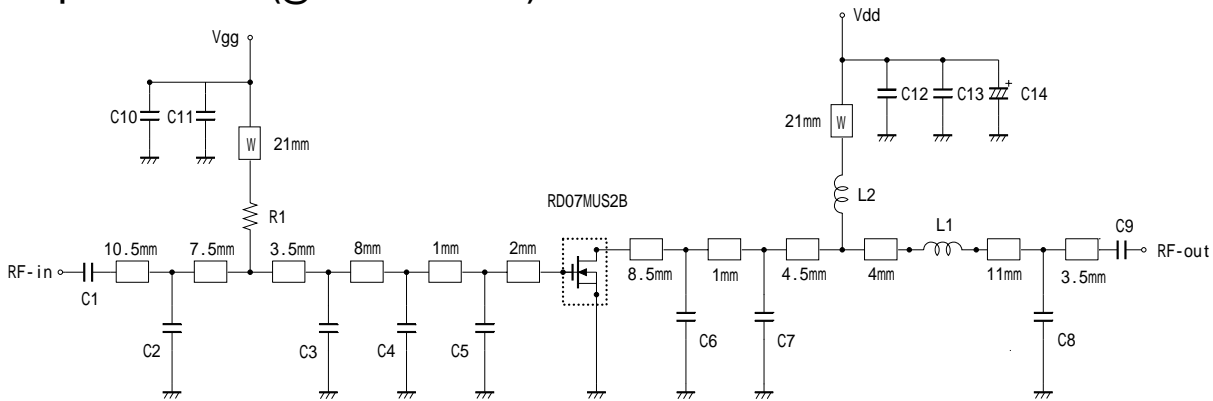

Note: Board material- Glass-Epoxy Substrate
 Micro strip line width=1.3mm/500HM, er:4.8, t=0.8mm
 W: Line width=1.0mm

Parts Type	Value	Type name	Vender	
Capacitor	C1	100pF	GRM2162C1H101JA01D	Murata Manufacturing Co., Ltd.
	C2	24pF	GRM2162C1H240JZ01D	Murata Manufacturing Co., Ltd.
	C3	27pF	GRM2162C1H270JZ01D	Murata Manufacturing Co., Ltd.
	C4	12pF	GRM2162C1H120JZ01D	Murata Manufacturing Co., Ltd.
	C5	56pF	GRM2162C1H560JZ01D	Murata Manufacturing Co., Ltd.
	C6	30pF	GRM2162C1H300JZ01D	Murata Manufacturing Co., Ltd.
	C7	22pF	GRM2162C1H220JZ01D	Murata Manufacturing Co., Ltd.
	C8	8pF	GRM2162C1H8R0DZ01D	Murata Manufacturing Co., Ltd.
	C9	100pF	GRM2162C1H101JA01D	Murata Manufacturing Co., Ltd.
	C10	22000pF	GRM216R11H223KA01E	Murata Manufacturing Co., Ltd.
	C11	1000pF	GRM188B11H102KA01	Murata Manufacturing Co., Ltd.
	C12	1000pF	GRM188B11H102KA01	Murata Manufacturing Co., Ltd.
	C13	22000pF	GRM216R11H223KA01E	Murata Manufacturing Co., Ltd.
	C14	22μF	A0603	NICHICON CORPORATION
Resistance	R1	4.7K OHM	CR1/10-472JB	Hokuriku Electric Industry Co.,Ltd.
Inductance	L1	6.6nH Enameled wire 2Turns, Diameter:0.23mm,φ1.66mm (the out side diameter)	2302S	Yoneda Processing Place Co.,Ltd.
	L2	31.0nH Enameled wire 6Turns, Diameter:0.23mm,φ1.66mm (the out side diameter)	2306C	Yoneda Processing Place Co.,Ltd.

