

MGFC47V5864

5.8 ~ 6.4GHz BAND 50W INTERNALLY MATCHED GaAs FET

DESCRIPTION

The MGFC47V5864 device is an internally impedance-matched GaAs power FET especially designed for use in 5.8 ~ 6.4GHz band amplifiers. The hermetically sealed metal-ceramic package guarantees high reliability.

FEATURES

- Class AB operation
- Internally matched to 50(ohm) system
- High output power
P1dB = 47dBm (TYP.) @ f=5.8 ~ 6.4 GHz
- High power gain
GLP = 9.5 dB (TYP.) @ f=5.8 ~ 6.4GHz
- High power added efficiency
PAE = 35 % (TYP.) @ f=5.8 ~ 6.4GHz

APPLICATION


Solid-state power amplifier for satellite earth-station communication transmitter and VSAT

RECOMMENDED BIAS CONDITIONS

- VDS = 10 (V)
- ID = 9.8 (A)
- RG=10 (ohm)

OUTLINE DRAWING

Unit : millimeters

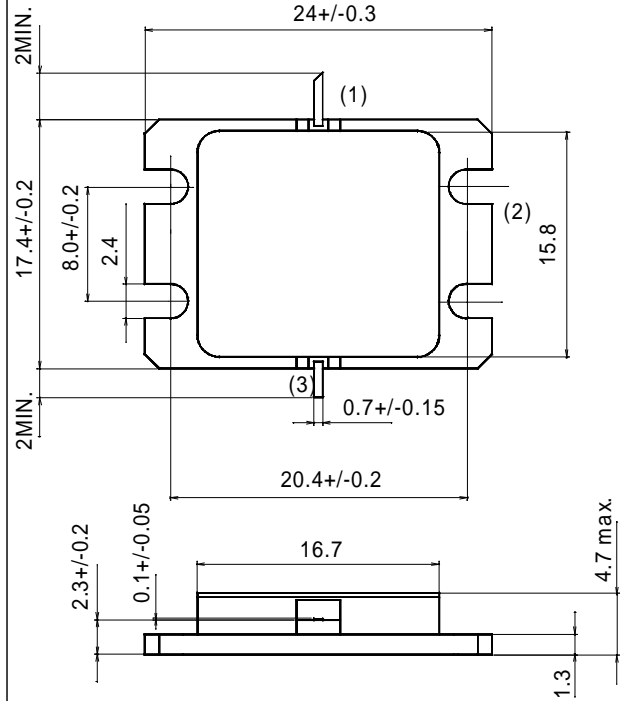

GF-53

- (1) : Gate
- (2) : Source
- (3) : Drain

ABSOLUTE MAXIMUM RATINGS (Ta=25deg.C)

Symbol	Parameter	Ratings	Unit
VGDO	Gate to drain voltage	-20	V
VGSO	Gate to source voltage	-10	V
IGR	Reverse gate current	-130	mA
IGF	Forward gate current	168	mA
PT *1	Total power dissipation	166	W
Tch	Channel temperature	175	deg.C
Tstg	Storage temperature	-65 / +175	deg.C

*1 : Tc=25deg.C

< Keep safety first in your circuit designs! >


Mitsubishi Electric Corporation puts the maximum effort into making semiconductor products better and more reliable, but there is always the possibility that trouble may occur with them. Trouble with semiconductors may lead to personal injury, fire or property damage. Remember to give due consideration to safety when making your circuit designs, with appropriate measures such as (1)placement of substitutive, auxiliary circuits, (2)use of non-flammable material or (3)prevention against any malfunction or mishap.

ELECTRICAL CHARACTERISTICS (Ta=25deg.C)


Symbol	Parameter	Test conditions	Limits			Unit
			Min.	Typ.	Max.	
VGS(off)	Pinch-off voltage	VDS = 3V , ID = 168mA	-1	-	-4	V
P1dB	Output power at 1dB gain compression	VDS=10V, ID(RF off)=9.8A, f=5.8 ~ 6.4GHz	46	47	-	dBm
GLP	Linear power gain		8.5	9.5	-	dB
ID	Drain Current		-	11	-	A
PAE	Power added efficiency		-	35	-	%
Rth(ch-c)	Thermal resistance	* delta Vf method	-	0.8	0.9	deg.C/W

*1 : Channel-case

Frequency vs GLP

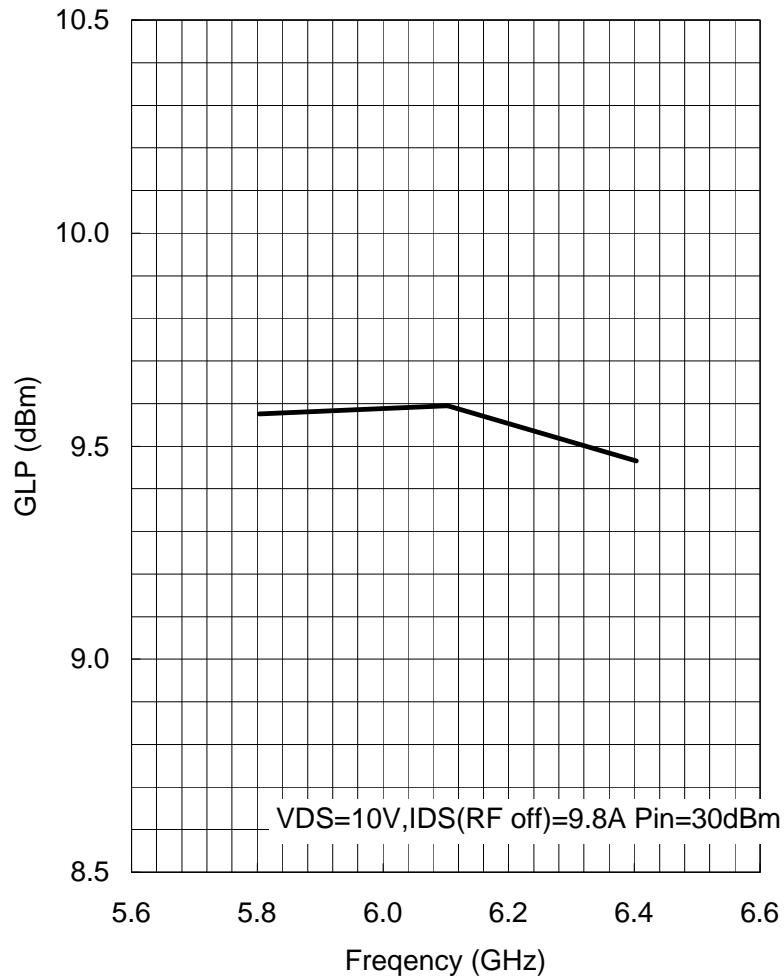


Frequency vs P1dB

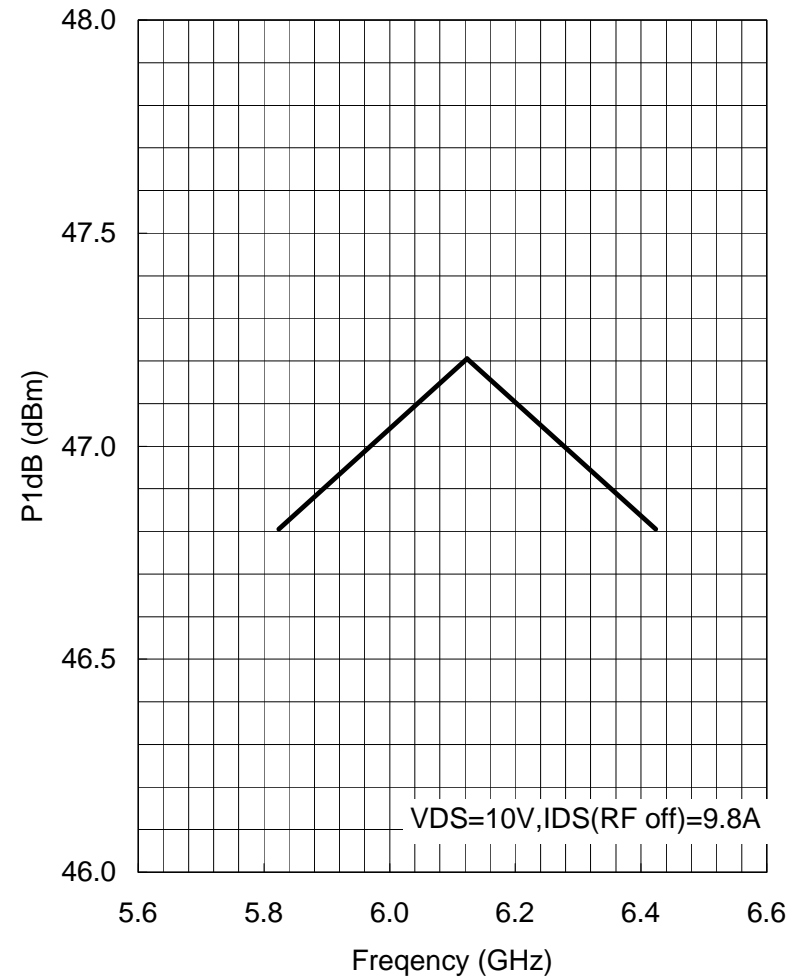


C-band 50W Power GaAs FET MGFC47V5864

June/2004

OUTPUT POWER & POWER ADDED EFFICIENCY vs. INPUT POWER

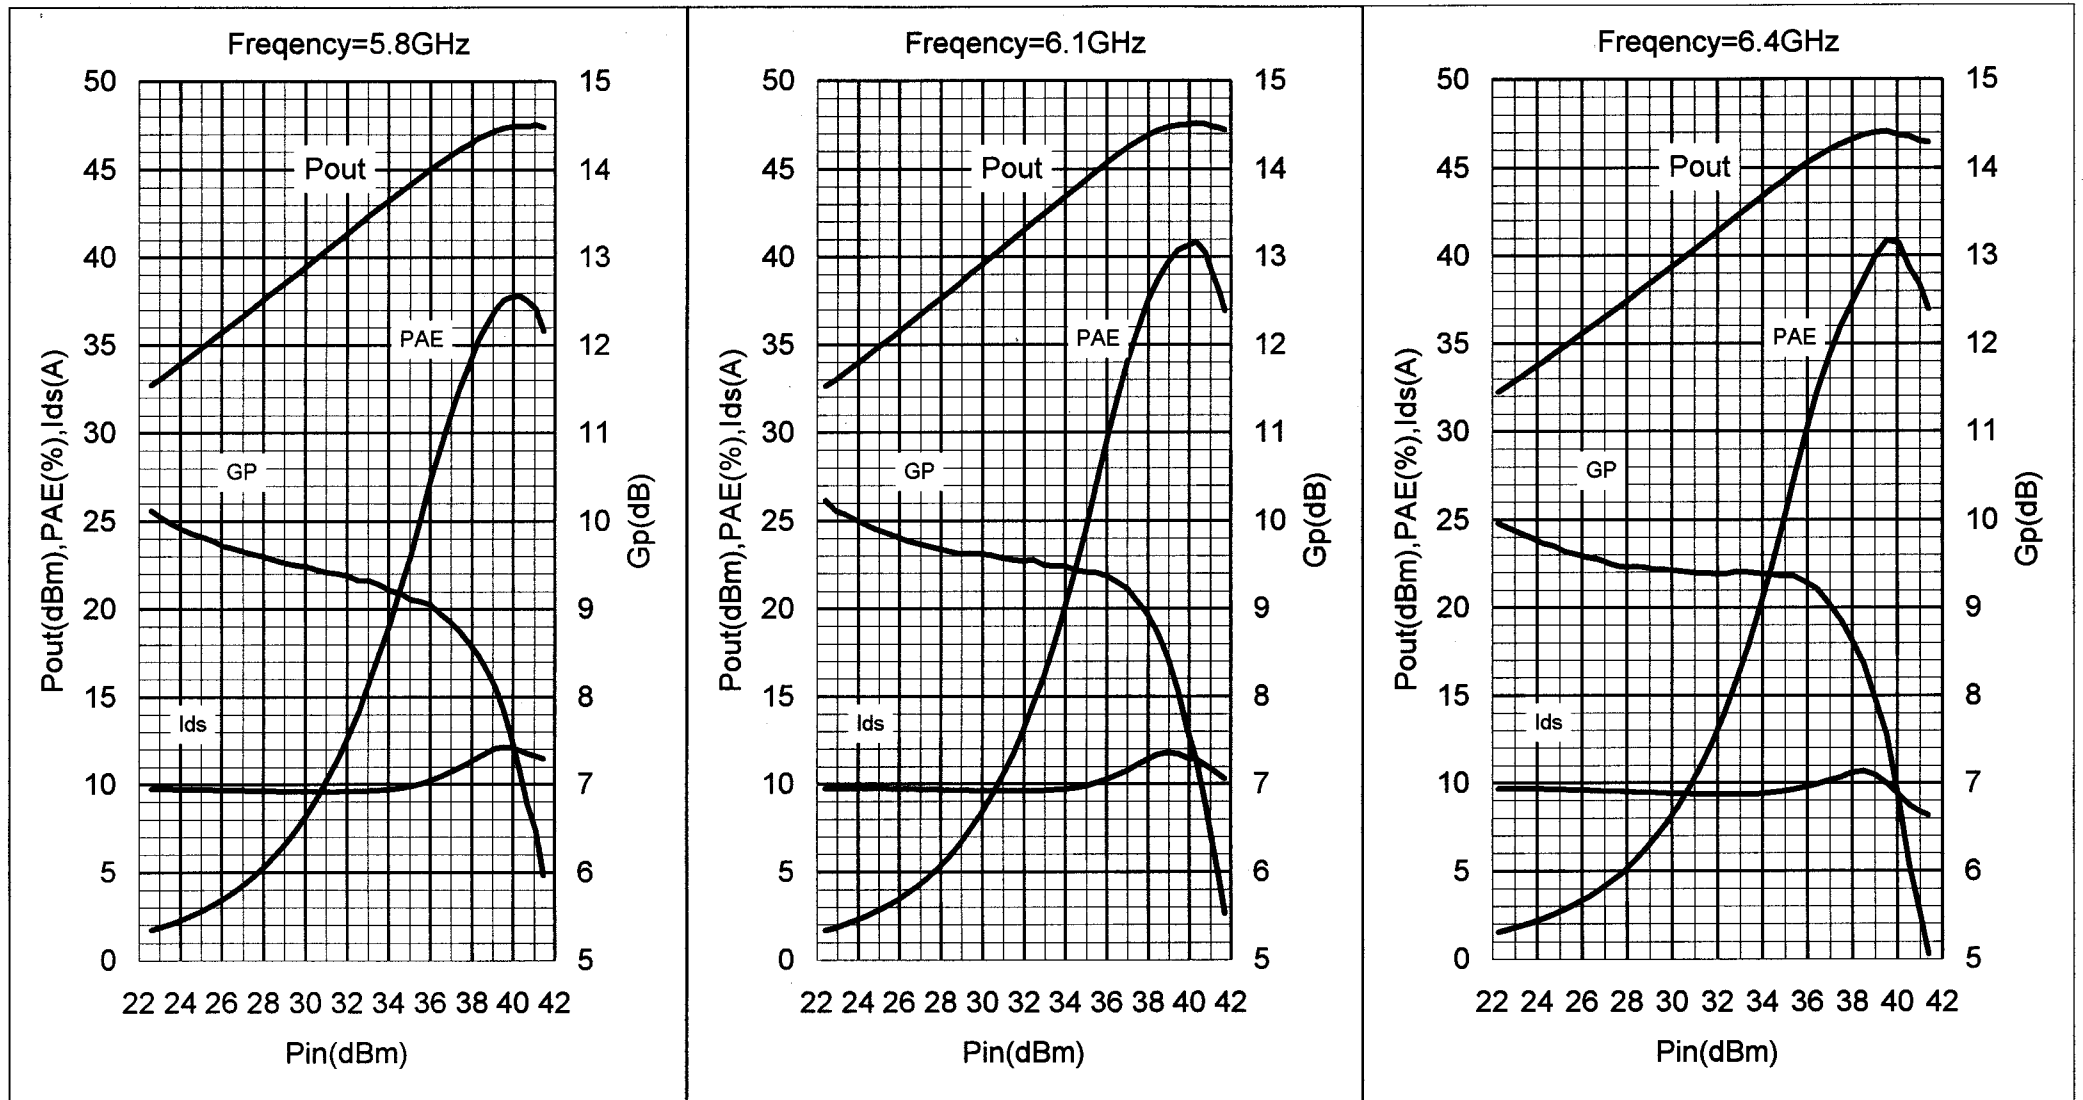

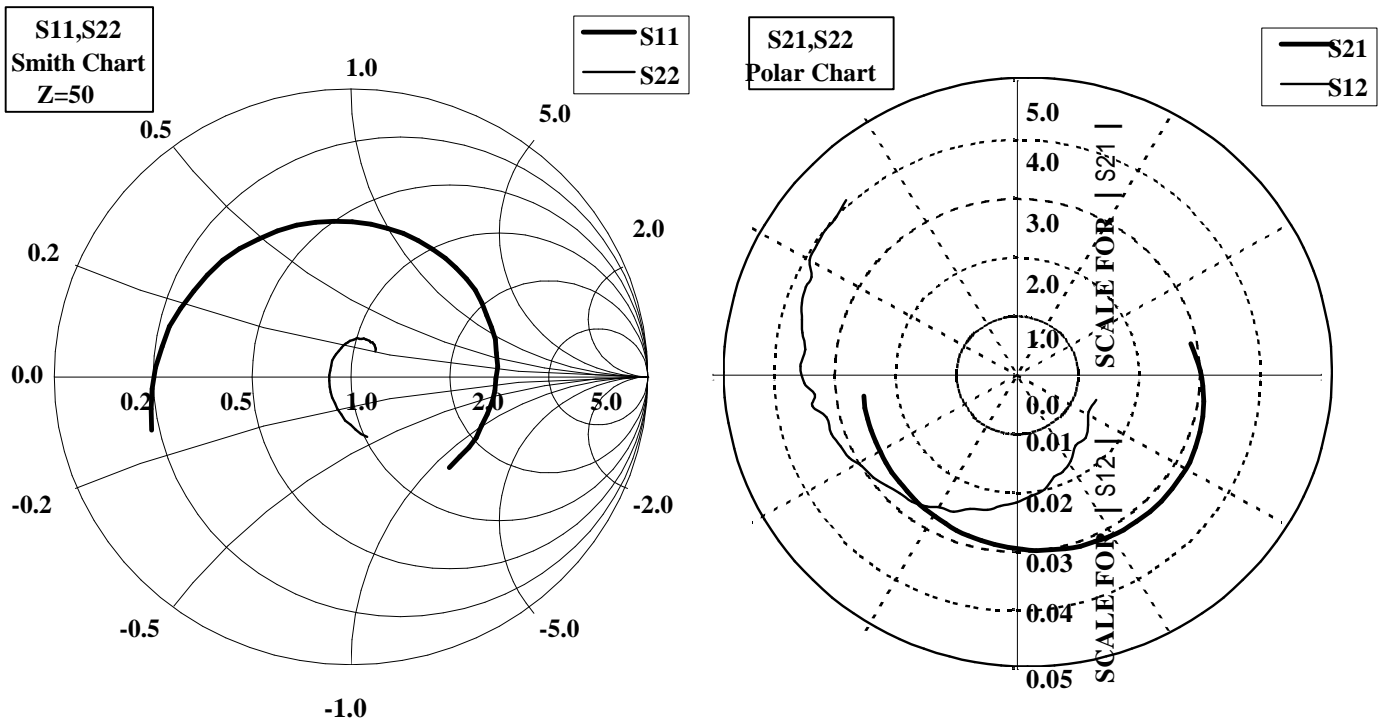

S PARAMETERES(T=25deg.C,VDS=10V,ID=8.0A)

f (GHz)	S Parameters(TYP.)							
	S11		S21		S12		S22	
	MAG.	ANG(deg.)	[MAG]	[ANG]	[MAG]	[ANG]	[MAG]	[ANG]
5.60	0.702	-163.8	2.723	10.1	0.024	-23.0	0.225	-76.8
5.65	0.676	-175.6	2.836	0.3	0.027	-42.2	0.194	-86.4
5.70	0.646	171.6	2.932	-9.7	0.030	-57.8	0.164	-97.8
5.75	0.621	158.6	3.011	-19.8	0.036	-71.4	0.132	-111.2
5.80	0.595	144.8	3.072	-30.0	0.040	-82.1	0.106	-129.1
5.85	0.576	131.1	3.091	-40.0	0.044	-95.0	0.087	-148.9
5.90	0.556	116.8	3.108	-49.8	0.049	-105.8	0.077	-175.9
5.95	0.540	102.9	3.111	-59.5	0.053	-117.2	0.075	158.2
6.00	0.528	89.8	3.082	-69.1	0.056	-126.1	0.083	135.8
6.05	0.518	76.5	3.061	-78.5	0.059	-135.8	0.090	119.1
6.10	0.514	64.2	3.033	-87.4	0.062	-144.8	0.102	106.2
6.15	0.510	51.9	2.999	-96.3	0.066	-153.7	0.110	97.2
6.20	0.508	40.5	2.961	-104.9	0.068	-162.2	0.118	87.5
6.25	0.502	29.4	2.933	-113.6	0.072	-170.7	0.125	81.7
6.30	0.498	18.8	2.888	-121.8	0.074	-177.0	0.126	74.6
6.35	0.493	8.4	2.859	-130.1	0.074	174.0	0.128	68.4
6.40	0.486	-2.0	2.817	-138.4	0.076	166.5	0.130	62.4
6.45	0.483	-11.9	2.793	-146.5	0.078	158.4	0.129	57.7
6.50	0.473	-22.4	2.770	-154.6	0.081	152.1	0.126	52.8
6.55	0.471	-33.0	2.751	-163.1	0.082	144.0	0.120	48.6
6.60	0.463	-44.9	2.727	-171.4	0.084	135.6	0.111	44.0

This S-Parameter data show measurements performed on each single-ended FET

MGFC47V5864**5.8 ~ 6.4GHz BAND 50W INTERNALLY MATCHED GaAs FET****Requests Regarding Safety Designs**

Mitsubishi Electric constantly strives to raise the level of its quality and reliability. Despite these concerted efforts, however, there will be occasions when our semiconductor products suffer breakdowns, malfunctions or other problems. In view of this reality, it is requested that every feasible precaution be taken in the pursuit of redundancy design, malfunction prevention design and other safety-related designs, to prevent breakdowns or malfunctions in our products from resulting in accidents involving people, fires, social losses or other problems, thereby upholding the highest levels of safety in the products when in use by customers.

Matters of Importance when Using these Materials

1. These materials are designed as reference materials to ensure that all customers purchase Mitsubishi Electric semiconductors best suited to their specific use applications. Please be aware, however, that the technical information contained in these materials does not comprise consent for the execution or use of intellectual property rights or other rights owned by Mitsubishi Electric Corporation.
2. Mitsubishi Electric does not assume responsibility for damages resulting from the use of product data, graphs, charts, programs, algorithms or other applied circuit examples described in these materials, or for the infringement of the rights of third-party owners resulting from such use.
3. The data, graphs, charts, programs, algorithms and all other information described in these materials were current at the issue of these materials, with Mitsubishi Electric reserving the right to make any necessary updates or changes in the products or specifications in these materials without prior notice. Before purchasing Mitsubishi Electric semiconductor products, therefore, please obtain the latest available information from Mitsubishi Electric directly or an authorized dealer.
4. Every possible effort has been made to ensure that the information described in these materials is fully accurate. However, Mitsubishi Electric assumes no responsibility for damages resulting from inaccuracies occurring within these materials.
5. When using the product data, technical contents indicated on the graphs, charts, programs or algorithms described in these materials, assessments should not be limited to only the technical contents, programs and algorithm units. Rather, it is requested that ample evaluations be made of each individual system as a whole, with the customer assuming full responsibility for decisions on the propriety of application. Mitsubishi Electric does not accept responsibility for the propriety of application.
6. The products described in these materials, with the exception of special mention concerning use and reliability, have been designed and manufactured with the purpose of use in general electronic machinery. Accordingly these products have not been designed and manufactured with the purpose of application in machinery or systems that will be used under conditions that can affect human life, or in machinery or systems used in social infrastructure that demand a particularly high degree of reliability. When considering the use of the products described in these materials in transportation machinery (automobiles, trains, vessels), for objectives related to medical treatment, aerospace, nuclear power control, submarine repeaters or systems or other specialized applications, please consult with Mitsubishi Electric directly or an authorized dealer.
7. When considering use of products for purposes other than the specific applications described in these materials, please inquire at Mitsubishi Electric or an authorized dealer.
8. The prior consent of Mitsubishi Electric in writing is required for any reprinting or reproduction of these materials.
9. Please direct any inquiries regarding further details of these materials, or any other comments or matters of attention, to Mitsubishi Electric or an authorized dealer.